

PERGO®

ORIGINAL LAMINATE

FLOORS
FOR
REAL LIFE

2021

Quality levels – tough tougher and toughest!



living **Expression**

Superior durability
for all-round domestic use


- » Class 23 / 32
- » TitanX™
- » PerfectFold™
- » Fire Class C_{fl}-s1
- » **25 year guarantee***



original **Excellence & pro**

Outstanding durability
for the tough demands of everyday life

- » Class 23 / 33
- » TitanX™
- » PerfectFold™ and Uniclic®
- » Fire Class B_{fl}-s1/C_{fl}-s1
- » **Lifetime guarantee***



pro X


Extreme durability
for high-wear and public areas

- » Class 34
- » TitanX™
- » Uniclic®
- » Fire Class B_{fl}-s1
- » **Lifetime guarantee***


* guarantee for commercial use on request




- 1 Superior wear and scratch resistance layer
- 2 Crystal clear decor
- 3 Special impact layers
- 4 Moisture resistant HDF core
- 5 Back stabiliser

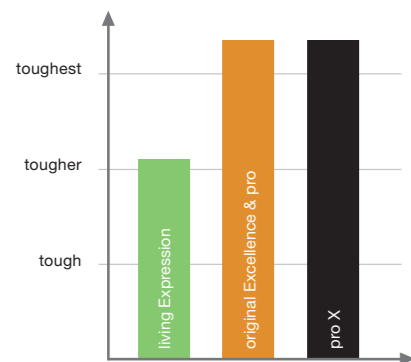

Scratch resistance

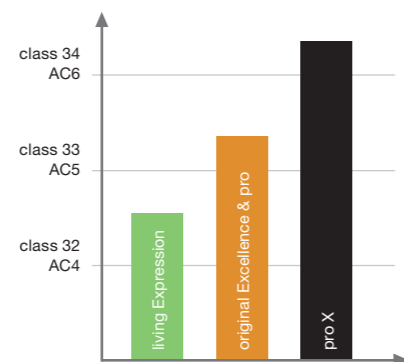

Wear resistance

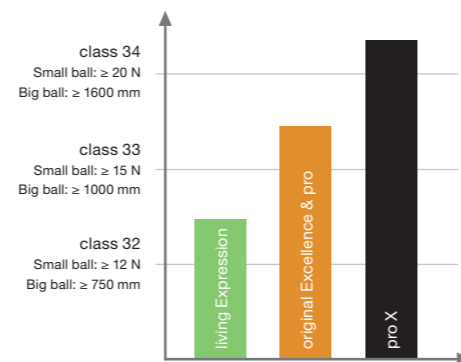

Impact resistance

Ready for a Sensation?

- » Deep, true-to-nature textures brings out every grain of a wood design
- » Matt surface for a naturalistic and exclusive look
- » Designed all the way from bevel to bevel
- » Pergo durability, surface protection, even in the bevels
- » AquaSafe technology for superior water-resistance



sensation aqua safe

NEW bergen

1380 x 156 x 8 mm
4-way bevel



- | | | | |
|---|--|--|---|
| COMFORT GREY OAK
pro L0246-05007
L0346-05007
GW / SM | RAILWAY OAK
pro L0246-05008
L0346-05008
GW / SM | COLOGNE OAK
pro L0246-05009
L0346-05009
GW / SM | PIER OAK
pro L0246-05010
L0346-05010
GW / SM |
|---|--|--|---|



- | | | | |
|---|---|--|---|
| VIENNA OAK
pro L0246-05011
L0346-05011
GW / SM | PORTMAN WALNUT
pro L0246-05012
L0346-05012
WO / SP | RED CLAY TEAK
pro L0246-05021
L0346-05021
WO / SP | TROMSDALEN OAK
pro L0246-05022
L0346-05022
WO / SP |
|---|---|--|---|

STRUCTURE: WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GS Genuine™ stone AW Antique wood GLOSS: SP Semi polished SM Silk matt MA Matt EM Extra matt

NEW
stavanger
1380 x 278.5 x 8 mm
4-way bevel



BLOSSOM OAK
■ pro L0245-04994
■ L0345-04994 GW / SM



VALLEY OAK
■ pro L0245-04995
■ L0345-04995 GW / SM



ABBAY OAK
■ pro L0245-04996
■ L0345-04996 GW / SM



NORTHERN OAK
■ pro L0245-04997
■ L0345-04997 GW / SM



SEASALT OAK
■ pro L0245-04998
■ L0345-04998 GW / SM



VITALETA OAK
■ pro L0245-04999
■ L0345-04999 GR / SM



BORGIO OAK
■ pro L0245-05000
■ L0345-05000 GW / SM



PORT OAK
■ pro L0245-05002
■ L0345-05002 GR / SM



WILDWOOD OAK
■ pro L0245-05003
■ L0345-05003 GR / SM



RIVER ROCK OAK
■ pro L0245-05004
■ L0345-05004 GR / SM



MOUNTAIN CABIN OAK
■ pro L0245-05005
■ L0345-05005 GR / SM



ATELIER OAK
■ pro L0245-05006
■ L0345-05006 GR / SM


wide long plank
2050 x 240 x 9.5 mm
4-way bevel



SIBERIAN OAK, PLANK
■ L0234-03568
■ L0334-03568 GW / MA




ROCKY MOUNTAIN OAK, PLANK
■ L0234-03570
■ L0334-03570 GW / EM



SEASIDE OAK, PLANK
■ L0234-03571
■ L0334-03571 GW / SM




CHATEAU OAK, PLANK
■ L0234-03589
■ L0334-03589 GW / MA




COUNTRY OAK, PLANK
■ L0234-03590
■ L0334-03590 GW / SM




LIGHT FJORD OAK, PLANK
■ L0234-03862
■ L0334-03862 GR / EM



FJORD OAK, PLANK
■ L0234-03863
■ L0334-03863 GR / EM



LODGE OAK, PLANK
■ L0234-03864
■ L0334-03864 GR / EM



CHALKED NORDIC OAK, PLANK
■ L0234-03865
■ L0334-03865 GW / MA



BEACH TOWN OAK, PLANK
■ L0234-03870
■ L0334-03870 GR / EM

modern plank
1380 x 190 x 8 mm
4-way bevel



LIMED GREY OAK, PLANK
■ L0231-03367
■ L0331-03367 GW / EM



URBAN GREY OAK, PLANK
■ L0231-03368
■ L0331-03368 GW / EM




NEW ENGLAND OAK, PLANK
■ L0231-03369
■ L0331-03369 GR / SM




MANOR OAK, PLANK
■ L0231-03370
■ L0331-03370 GR / SM



FARMHOUSE OAK, PLANK
■ L0231-03371
■ L0331-03371 GR / SM




MODERN DANISH OAK, PLANK
■ L0231-03372
■ L0331-03372 GW / SM




BRUSHED WHITE PINE, PLANK
■ L0231-03373
■ L0331-03373 GW / EM



COASTAL OAK, PLANK
■ L0231-03374
■ L0331-03374 GW / EM



VILLAGE OAK, PLANK
■ L0231-03375
■ L0331-03375 GW / EM



SCRAPED VINTAGE OAK, PLANK
■ L0231-03376
■ L0331-03376 GR / SP




FROST WHITE OAK, PLANK
■ L0231-03866
■ L0331-03866 GW / MA



STUDIO OAK, PLANK
■ L0231-03867
■ L0331-03867 GW / MA



CITY OAK, PLANK
■ L0231-03868
■ L0331-03868 GW / MA



BLACK PEPPER OAK, PLANK
■ L0231-03869
■ L0331-03869 GR / SM

modern plank
1380 x 190 x 9 mm
4-way bevel



NORTH CAPE OAK, PLANK
■ L0239-04289
■ L0339-04289 GW / MA



NORDIC SAND OAK, PLANK
■ L0239-04291
■ L0339-04291 GW / MA



SKAGEN OAK, PLANK
■ L0239-04293
■ L0339-04293 GW / MA




STOCKHOLM OAK, PLANK
■ L0239-04295
■ L0339-04295 GW / MA




ISLAND OAK, PLANK
■ L0239-04297
■ L0339-04297 GW / MA



TUNDRA OAK, PLANK
■ L0239-04299
■ L0339-04299 GW / MA








RIVERSIDE OAK, PLANK
■ L0239-04301
■ L0339-04301 GW / MA



GREY BARNHOUSE OAK, PLANK
■ L0239-04303
■ L0339-04303 GR / MA







MOORLAND OAK, PLANK
■ L0239-04305
■ L0339-04305 GR / MA

				
BARNHOUSE OAK, PLANK ■ L0239-04307 ■ L0339-04307 GR / MA	MEADOW OAK, PLANK ■ L0239-04309 ■ L0339-04309 GW / SM	VINTAGE GREY OAK, PLANK ■ L0239-04311 ■ L0339-04311 GW / SM	ESTATE OAK, PLANK ■ L0239-04313 ■ L0339-04313 GW / SM	WEATHERED PINE, PLANK ■ L0239-04315 ■ L0339-04315 GW / MA

aqua safe





NEW
mandal
1200 x 190 x 8 mm





			
NATURAL OAK ■ pro L0247-01804 ■ L0347-01804 GW / SM	DARK GREY OAK ■ pro L0247-01805 ■ L0347-01805 GW / SM	VINEYARD OAK ■ pro L0247-05023 ■ L0347-05023 GW / MA	MISTY OAK ■ pro L0247-05024 ■ L0347-05024 GW / MA

sensation **aqua safe**





NEW
narvik
1380 x 190 x 9 mm
4-way bevel

			
TASMANIAN OAK ■ L0239-04317 ■ L0339-04317 WO / MA	REFINED WALNUT, PLANK ■ L0239-04319 ■ L0339-04319 WO / MA	SANDBANK OAK ■ pro X L0139-04450 WO / EM	WOODBIDGE OAK ■ pro X L0139-04609 WO / EM

			
SOFT CABIN OAK ■ pro L0247-05025 ■ L0347-05025 GW / MA	MAINE OAK ■ pro L0247-05026 ■ L0347-05026 GW / MA	SEA STACK OAK ■ pro L0247-05027 ■ L0347-05027 GW / MA	POTTERY OAK ■ pro L0247-05028 ■ L0347-05028 GW / MA





			
GREY BEACH OAK ■ pro X L0139-05188 WO / EM	CRISPY CHALKED OAK ■ pro X L0139-05189 WO / EM	LIGHT PRIME OAK ■ pro X L0139-05190 WO / EM	PRIME OAK ■ pro X L0139-05191 WO / EM






long plank
2050 x 205 x 9.5 mm
4-way bevel





			
MODERN GREY OAK, PLANK ■ L0223-01753 ■ L0323-01753 GW / SM	CHOCOLATE OAK, PLANK ■ L0223-01754 ■ L0323-01754 GW / SM	DRIFT OAK, PLANK ■ L0223-01755 ■ L0323-01755 GW / SM	EUROPEAN OAK, PLANK ■ L0223-01756 ■ L0323-01756 GW / SM






aqua safe

NEW
drammen
1200 x 190 x 8 mm
4-way bevel

			
BROWN LEATHERED OAK ■ pro L0248-05013 ■ L0348-05013 GR / SM	SANDWAVE OAK ■ pro L0248-05014 ■ L0348-05014 GR / SM	WHITE GLOOM OAK ■ pro L0248-05015 ■ L0348-05015 GR / SM	ISLA OAK ■ pro L0248-05016 ■ L0348-05016 GR / MA

				
BURNT OAK, PLANK ■ L0223-01757 ■ L0323-01757 GW / SM	RECLAIMED GREY OAK, PLANK ■ L0223-01760 ■ L0323-01760 GR / SM	MIDNIGHT OAK, PLANK ■ L0223-01763 ■ L0323-01763 GW / SM	WINTER OAK, PLANK ■ L0223-01764 ■ L0323-01764 GW / SM	AUTUMN OAK, PLANK ■ L0223-01765 ■ L0323-01765 GW / SM





			
RICARD OAK ■ pro L0248-05017 ■ L0348-05017 GR / MA	CAPPUCCINO OAK ■ pro L0248-05018 ■ L0348-05018 GR / MA	CORNWALL OAK ■ pro L0248-05019 ■ L0348-05019 GR / MA	DARTMOOR OAK ■ pro L0248-05020 ■ L0348-05020 GR / MA

				
NATURAL ASH, PLANK ■ L0223-01766 ■ L0323-01766 AW / SM	CLASSIC BEIGE OAK, PLANK ■ L0223-03359 ■ L0323-03359 GR / SM	ROYAL OAK, PLANK ■ L0223-03360 ■ L0323-03360 GR / SM	ROMANTIC OAK, PLANK ■ L0223-03361 ■ L0323-03361 GW / SM	COTTAGE GREY OAK, PLANK ■ L0223-03362 ■ L0323-03362 GW / SM



■ pro X ■ original Excellence & pro ■ living Expression

STRUCTURE: WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GS Genuine™ stone AW Antique wood GLOSS: SP Semi polished SM Silk matt MA Matt EM Extra matt

big slab
1224 x 408 x 8 mm
4-way bevel

			
CHARCOAL SLATE L0220-01778 L0320-01778 GS / MA	MEDIUM GREY SLATE L0220-01779 L0320-01779 GS / MA	LIGHT GREY SLATE L0220-01780 L0320-01780 GS / MA	ALPACA SLATE L0220-01781 L0320-01781 GS / MA






big slab
1224 x 408 x 8 mm






	
CONCRETE MEDIUM GREY L0218-01782 L0318-01782 SO / MA	WHITE SLAB L0218-01783 L0318-01783 SO / MA

■ pro X ■ original Excellence & pro ■ living Expression

DOMESTIC elegance

1200 x 190 x 7 mm
Class 23 / 32 » TitanX™ | Uniclic | Fire Class C_{fl}-s1 | 20 year guarantee*

				
VINEYARD OAK, PLANK L0601-04386 L0607-04386 – 4-way bevel GW / SM	MILK WHITE OAK, PLANK L0601-04387 L0607-04387 – 4-way bevel GW / SM	ELEGANT GREY OAK, PLANK L0601-04388 L0607-04388 – 4-way bevel GW / SM	RIVER OAK, PLANK L0601-04389 L0607-04389 – 4-way bevel GW / SM	NATURAL BEIGE OAK, PLANK L0601-04390 L0607-04390 – 4-way bevel GW / SM

				
HIGHLAND BROWN OAK, PLANK L0601-04391 L0607-04391 – 4-way bevel GW / SM	CONVENT OAK, PLANK L0601-04392 L0607-04392 – 4-way bevel GW / SM	CANYON OAK, PLANK L0601-04393 L0607-04393 – 4-way bevel GW / SM	WARM NATURAL OAK, PLANK L0601-04394 L0607-04394 – 4-way bevel GW / SM	WATERFRONT OAK, PLANK L0601-04395 L0607-04395 – 4-way bevel GW / SM


STRUCTURE: WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GS Genuine™ stone AW Antique wood GLOSS: SP Semi polished SM Silk matt MA Matt EM Extra matt




5 perfect finishes in 1




PGINCP(-), 2150 x 48 x 13 mm
See matching matrix for correct art no

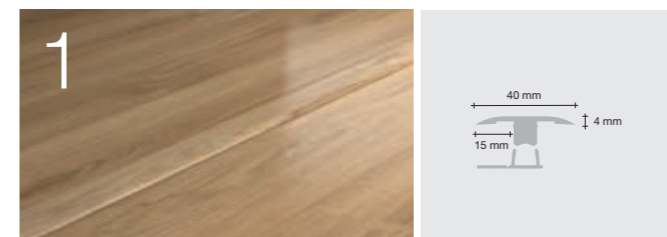


1
T-moulding
From laminate to laminate.

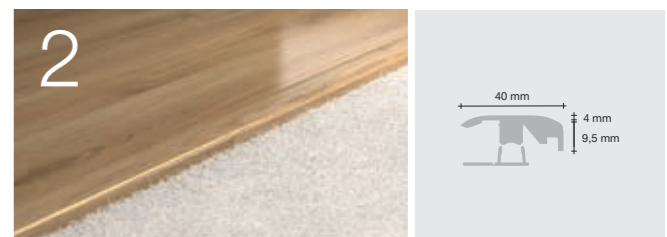


2
Carpet transition
From laminate to carpet.

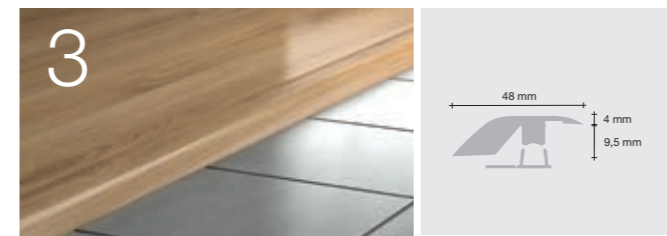

3
Hard surface reducer
From laminate to ceramic, vinyl or linoleum.

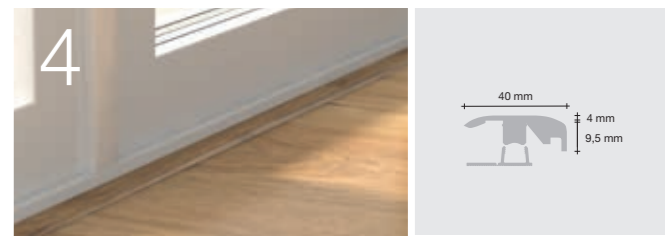

4
End moulding
Finishing up to threshold, sliding doors, etc.

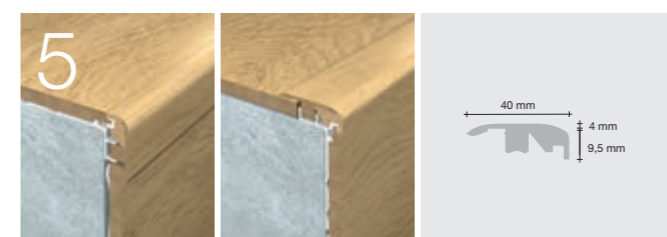


5
Stair nose moulding, flush
For a flush finish on stair treads.

Stair nose moulding
For a step down from a floating floor, e.g. at the top of the stairs or a step down in a room.

The Incizo® subprofile is required for stair application and has to be ordered separately.


NEINCPBASE(-)
See matching matrix for correct art no.



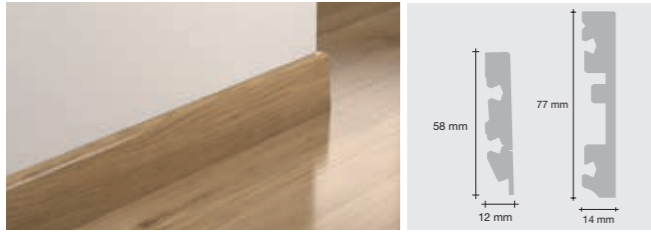


Wallbase, straight
PGSK(-), 2400 x 12 x 58 mm*
PGPSK(-), 2400 x 14 x 77 mm

Colour matched: see matching matrix for correct art no.
Surface: wear and scratch-resistant laminate. Core: MDF.
PGSK(-) is adaptable to 40 mm height.
*8 straight and 8 corner connecting plugs included / pack (6 wallbases).

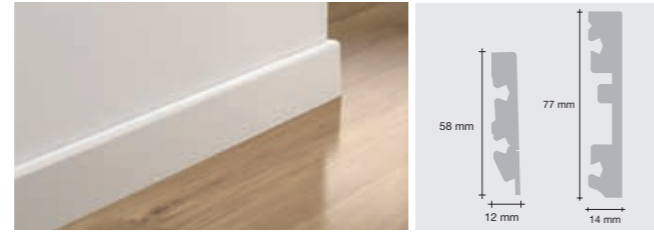


Wallbase, straight
PGSKWHITE, 2400 x 12 x 58 mm – white*
PGSKPAINT, 2400 x 12 x 58 mm – paintable*
PGPSKWHITE, 2400 x 14 x 77 mm – white
PGPSKPAINT, 2400 x 14 x 77 mm – paintable

Colour: white, paintable. Surface: foil. Core: MDF.
*8 straight and 8 corner connecting plugs included / pack (6 wallbases).

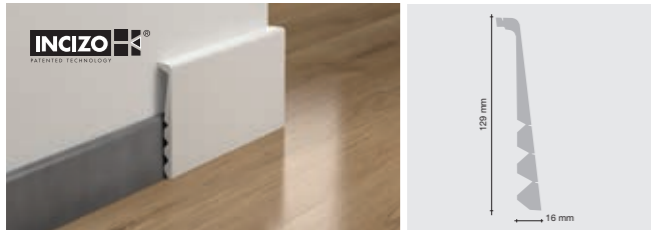


Wallbase, cover
PGISKRCOVER, 2400 x 16 x 129 mm

For easy and fast renovation.
Covers existing wallbase. Adaptable size.
Colour: paintable. Surface: foil. Core: MDF.

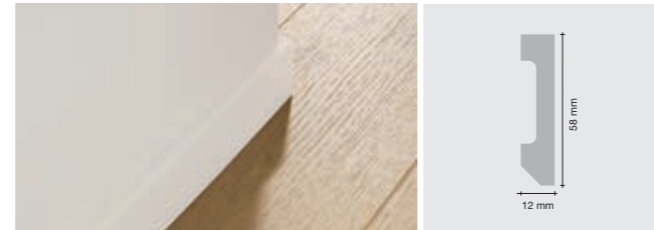

Waterproof wallbase
NEVSKRPAINA, 2000 x 12 x 58 mm


Waterproof. Hides expansion joints and protects walls.
Install with Multiglue. Colour: white, paintable.
Surface and core: waterproof polystyreen.

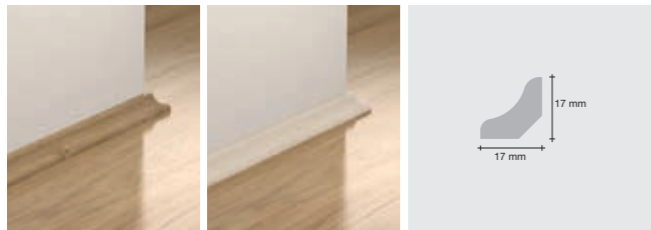

Beading
PGSCOT(-), 2400 x 17 x 17 mm
PGSCOTWHITE, 2400 x 17 x 17 mm – white
PGSCOTPAINT, 2400 x 17 x 17 mm – paintable


Colour matched: see matching matrix for correct art no.
Surface: wear and scratch-resistant laminate. Core: MDF.

White and paintable beading: surface: foil. Core: MDF.

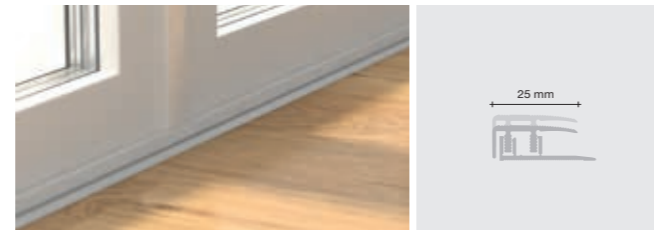


End moulding
PGENPSILVME270, 2700 x 25 mm

Fits flooring thickness 6 – 10 mm. Colour: silver. Surface: aluminium.

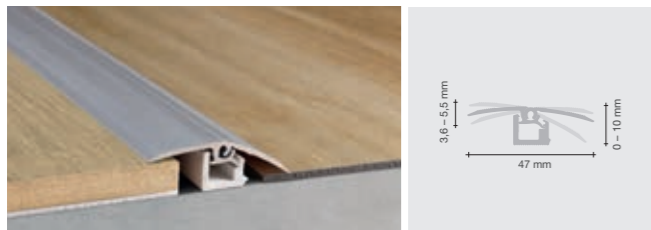

Combi moulding
PGPRSILV, 1860 x 47 mm


T-moulding and reducer in one. Plastic bottom rail.
Suitable for height differences of 0 – 12.3 mm.
Height: 10 mm (uninstalled). Colour: silver. Surface: aluminium.

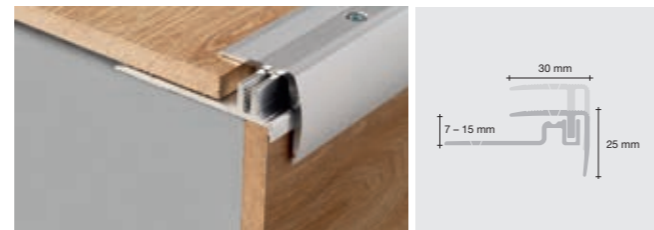

Stair nose
PGSTPSILVME270, 2500 x 30 x 25 mm


Fits flooring thickness 7 – 15 mm. Colour: silver. Surface: aluminium.

Commercial moldings

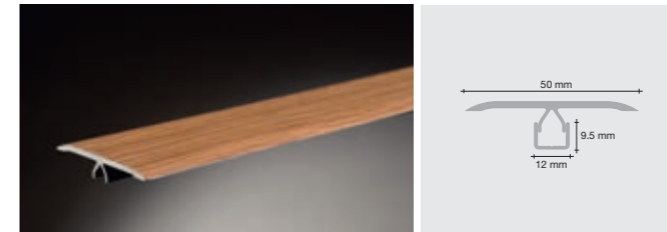


T-moulding, colour matched
PGEXPC(-), 2350 x 50 mm

From laminate to laminate. See matching matrix for correct art no.
Easy installation with snap-in function. Material: solid aluminium.
Surface: wear- and scratch resistant laminate. Minimum order quantity: 30 pc.

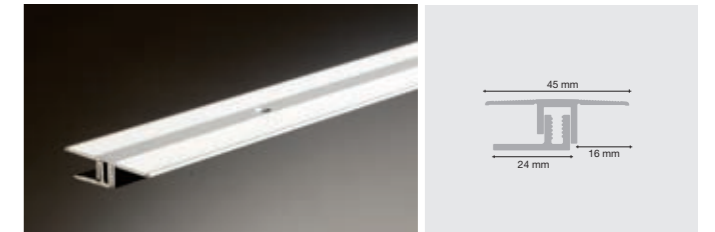


T-moulding, silver
PGEXPCSILVME270, 2700 x 45 mm

Flexible in height. Flooring thickness (including underlay) 7 – 18 mm.
Surface: aluminium.

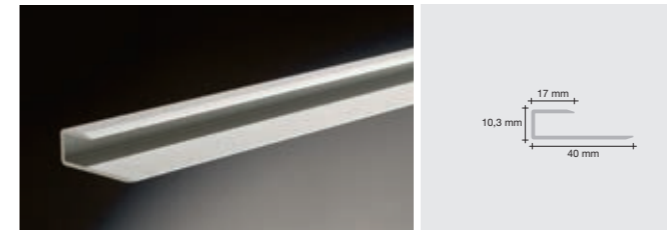


End moulding, silver
PGENPCSILVME270, 2700 x 17 mm

Fits to flooring thickness of 9 – 10 mm. Surface: aluminium.

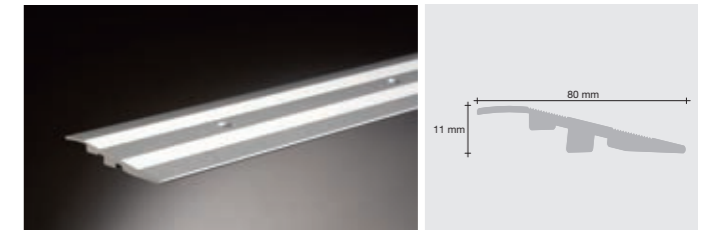

Ramp profile, silver
PGRPC80SILVME270, 2700 x 80 mm


Flexible in height. Flooring thickness (including underlay) 9 – 15 mm.
Extremely resistant aluminium profile. Surface: aluminium.

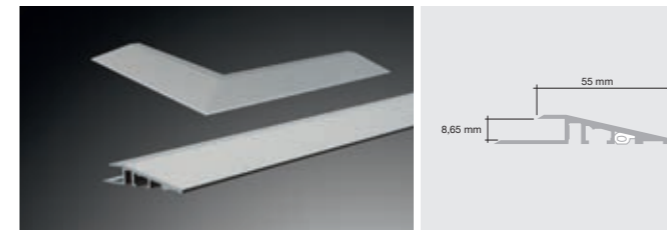

Ramp profile without screws
PGRPC55SILVME315A, 3150 x 55 mm

Fits to flooring thickness of 8 – 9 mm.
With EPDM moulding and plastic connectors. Surface: aluminium.

Precut 90° corner without screws
PGRPC55CORN SILVMEA

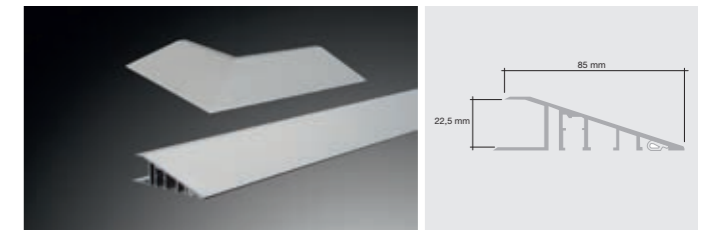

Ramp profile high without screws
PGRPC85SILVME315, 3150 x 85 mm

Fits to flooring construction of 22 mm. Surface: aluminium

Precut 90° corner without screws
PGRPC85CORN SILVME



End profile, bendable
NEBENDPCSILVME270, 2700 x 28 mm




For finishing laminate "islands" in curved shapes.
Height 13.1 mm. Surface: silver anodized aluminium.
10 pc / pack. To be installed with special bending tool NEBTOOL.






Bending tool
NEBTOOL, 380 x 410 mm

For use in combination with bendable end profile.
Height 235 mm. 1 pc / pack.

Underlays for wood subfloors

	GOOD Underlay Foam	BETTER Smart Underlay	BEST Silent Walk
Durability	●●○○○○	●●●●○○	●●●●●●
Walking sound reduction	●●○○○○	●●●○○○	●●●●●○
Floor heating	●●●●○○	●●●○○○	●●●●●●
Vapour barrier	NO	NO	YES*
Thickness	2 mm	3 mm	2 mm
			
	Underlay Foam PGUDLFOAM15B For rooms with light traffic. 15 m ² / roll.	Smart Underlay PGUDLSMART15 For rooms with frequent traffic. 15 m ² / pack.	Silent Walk PGUDLSW7 A very durable and strong underlay for rooms with more frequent traffic. 7 m ² / roll.

Underlays for concrete subfloors

	GOOD Underlay Foam+	BETTER Smart Underlay+	BEST Silent Walk
Durability	●●●○○○	●●●●○○	●●●●●●
Walking sound reduction	●●●○○○	●●●○○○	●●●●●○
Floor heating	●●●●○○	●●●○○○	●●●●●●
Vapour barrier	YES	YES	YES*
Thickness	2 mm	3 mm	2 mm
			
	Underlay Foam+ PGUDLFOAMPLUS15 A good basis for rooms with less traffic. Integrated vapour barrier with an overlap and tape strip included. 15 m ² / roll.	Smart Underlay+ PGUDLSMARTPLUS15 Good in rooms with more frequent traffic. Integrated vapour barrier with an overlap and tape strip included. 15 m ² / pack.	Silent Walk PGUDLSW7 A very durable and strong underlay for rooms with more frequent traffic. 7 m ² / roll.


*When installing the SilentWalk on concrete floors or atop floorheating, tape the edges of the underlay with a damp-proof tape. Don't do this when installing on wooden subfloors.

Professional SoundBloc™
PGUDLPS15, 0.95 x 15.79 m = 15 m² / roll
PGUDLPS50, 0.95 x 52.64 m = 50 m² / roll

The best underlay for eliminating reflected walking sound. Increases walking comfort and provides excellent impact sound insulation. Integrated vapour barrier with an overlap and tape strip included. Thickness: 2 mm. Material: Crosslinked polyethelene foam.



Floor heating

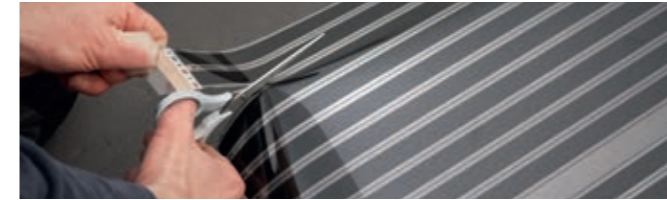

QuickHeat foil

NEUDLQH60X300, 0.6 x 3 m
NEUDLQH60X500, 0.6 x 5 m
NEUDLQH60X700, 0.6 x 7 m
NEUDLQH100X300, 1 x 3 m
NEUDLQH100X500, 1 x 5 m
NEUDLQH100X700, 1 x 7 m

NEUDLQH120X300, 1.2 x 3 m
NEUDLQH120X500, 1.2 x 5 m
NEUDLQH120X700, 1.2 x 7 m

60 W / m². 230 V. Max installation 50 m².



QuickHeat plates

NEUDLQHPLATE, 120 x 50 x 0.7 cm

Insulation board. 10 plates / pack. 0.6 m² / plate, 6 m² / pack.
Thickness: 7 mm.
Use of vapour barrier is recommended. PE film PGUDLSCREEN34.
Place PE film under QuickHeat plates as well as on top of QuickHeat foil.



Controller kit, wireless

NEQHKITWIFI, 12 x 10 x 3.5 cm

Multi room control via app on smartphone. Plug in with power plug.
Three programs: constant, day / night and weekly program 5 + 2.

Extension cables

NEQHEXTCAB100, 1.0 m
NEQHEXTCAB300, 3.0 m

Foils are plugged together via connector system. You can plug a cable (1 m or 3 m) in the last foil directly to the thermostat.

Installation



Moisturbloc Extreme™

PGUDLMOI15, 1.05 x 15 m = 15 m²

This vapour barrier has three times the moisture resistance of a traditional PE film. Can be installed on concrete floors with up to 95% relative humidity, making it ideal in basements and on concrete floors with high humidity. Moisturbloc Extreme™ makes it possible to install floors earlier during the construction of new homes.

Thickness: 2.5 mm. Material: Polypropylene. Tape included.



PE film (polyethylene)

PGUDLSCREEN34, 12.5 x 2.7 m = 33.75 m² / roll

A film that protects flooring from moisture vapour rising up from a mineral or concrete subfloor. Useful lifetime 50 years. Thickness: 0.2 mm. Material: Polyethylene, alkaline resistant.



Installation kit

PGTOOL

Everything you need in one box. Contains tapping block, installation spacers in two sizes (2 x 18 = 36 pcs) and a pull bar.

Extra spacers

PGSPACER, 48 pcs



Extra connecting plugs

NEPLUG, 48 pcs

For PGSK(-) and PGPSK(-) wallbases only. 24 corner plugs + 24 straight plugs.



Wallbase installation clips
PGCLIPSKME7080
– for 7 – 8 mm floors
PGCLIPSKME95
– for 9 – 9.5 mm floors

For PGSK(-) wallbases only.
Easy-to-use snap-in system where no nails or screws are needed.
One installation kit covers 20 metres of wallbase.



Wallbase installation track
NETRACK

For PGPSK(-) wallbases only.
Glue on installation. Useful for easy access of hidden cables.
One track per skirting is needed.



Safeseal
PGSEAL500, 500 ml

For floor areas that require extra protection against moisture.
PVAc based.



Wood tapping block
PGWTAPPINGBLOCK,
520 x 110 x 62 mm

Professional tapping block.
10 pc / pack.



Professional pullbar
PGWPULLBAR, 700 x 280 x 230 mm

Professional and slent pullbar thanks to the rubber shock absorber on the contact surface. 1 pc / pack.



Laminate cutter
PGLAMCUT, 700 x 280 x 230 mm

Manual, steel cutter. Positionable trestle for long boards and dust collector, included.
1 pc / pack.



Multiglue
PGGLUE290, 290 ml

Ideal for installing wallbases and mouldings. Hybrid polymer.
One tube gives 15 running meters of skirting.



Sealant
PGKIT(-), 310ml

For a beautiful finish. Dry in half an hour and fully cured after 24 hours. Available in 8 colours.
Water-based acrylic.

Maintenance



Cleaning kit
PGCLEANKIT

High-quality mop set with extra-long ergonomic handle and a mop cloth holder with a practical Velcro fastener for attaching the mop cloth.



All round Floor Cleaner
PGCLEANALL1000

Specially developed for cleaning laminate, wood and vinyl flooring. Ideal for removing dirt, grease spots and heel marks, as well as for daily cleaning.



Repair wax
PGREPAIR

Repair the colour of damaged planks quickly and easily with wax in colours covering the Pergo wood palette. Contains 1 melting knife, 1 comb, 7 wax blocks. For more information on how to mix colours please visit pergo.com.



Radiator caps
PGRCINOX15, stainless steel
Inner / outer diameter: 15 / 54 mm.
PGRCINOX22, stainless steel
Inner / outer diameter: 22 / 54 mm.



Tape
NETAPE50, 50 m x 5 cm
Self-adhesive aluminium tape for underlays.

For water resistance in wet areas



Aqua Sealant
PGKITTRANSP, 310 ml

For invisible and waterproof finishing around wallbases, mouldings, transitions, door frames, etc.



Foamstrip
NEFOAMSTRIP20, 20 m x 10 mm

PE foam expansion joint filler. Serves as an elastic filler of all dilatation gaps around the floor perimeter. Requires sealing with Aqua Sealant.

Cleaning instructions

Ordinary cleaning

Damp-mop the floor, only when needed. Use Pergo All-round Floor Cleaner and Pergo mop cloth. Damp the mop cloth with warm water and Pergo All-round Floor Cleaner (mix 2 capfuls of Pergo All-round Floor Cleaner in 10 litre water). Mix carefully according to the manufacturer's instructions. Do not overuse. Used mop should be washed according to labelling in 60 °C without any additives. Do not work in larger areas than 15 – 20 m² at a time. Make sure the floor is dry after damp mopping.

Heavily soiled or stained floors

To remove stubborn stains or markings use Pergo All-round Floor Cleaner and a clean mop, towel or a scratch free white or red pad if extra treatment is needed. Let it act for a few minutes. Remove the stain by wiping it away with a clean mop dampened with lukewarm water. Repeat if necessary. Wipe dry afterwards.

Stain removal guide

Locally spotted areas: Apply Pergo All-round Floor Cleaner to the spot. Let the floor cleaner dissolve the stain for a few minutes. Remove the stain by wiping it away with a clean mop dampened with lukewarm water. Repeat if necessary.

Chocolate, grease, juice, cordials, wine: Spray with Pergo All-round Floor Cleaner or use warm water added with All-round Floor Cleaner.

Tar, crayon, lipstick, shoe polish, ink, carbon, nail polish or cigarettes: Methylated spirit, acetone or household solvent, petroleum spirit.

Candle wax and chewing gum: Allow to harden then carefully scrape off.

Avoid wax and polish

A Pergo laminate floor should never be waxed or polished. Never scrub with steel wool or any other coarse material as this may have a negative effect on the appearance and structure.






Additional treatments






Some textured surfaces require special treatment as described below:
Matt textures: Dirt will generally stick harder to floors with matt textures. We therefore recommend that these types of floors be cleaned more regularly.
Polished textures: Dried watermarks are often more visible on polished textures. Always wipe with a dry mop after damp cleaning.
Floors with bevelled edges: Because water can accumulate in the bevel, be sure to always wipe dry.

Protect your floor

We recommend using wheels for hard floors on office chairs. Also protect the floor by using felt pads on furniture legs. Always use a doormat at the front entrance.

Matching matrix

pro X	original Excellence & pro	living Expression	Art.nr / Decor					
				5-in-1	Wallbase straight	Wallbase straight	Beading	Sealant
				13 x 48 PGINCP(-)	12 x 58 PGSK(-)	14 x 77 PGPSK(-)	17 x17 PGSCOT(-)	310 ml PGKIT(-)
L0139-04450			WOODBIDGE OAK	01849	01849			08
L0139-04609			SANDBANK OAK	01854	01854			02
L0139-05188			GREY BEACH OAK	03558	03558			02
L0139-05189			CRISPY CHALKED OAK	03866	03866			01
L0139-05190			LIGHT PRIME OAK	04291	04291			02
L0139-05191			PRIME OAK	04295	04295			04
	L0218-01782	L0318-01782	CONCRETE MEDIUM GREY	01782	01782	01782	01782	02
	L0218-01783	L0318-01783	WHITE SLAB	01783	01783	01783	01783	01
	L0220-01778	L0320-01778	CHARCOAL SLATE	01778	01778	01778	01778	02
	L0220-01779	L0320-01779	MEDIUM GREY SLATE	01779	01779	01779	01779	02
	L0220-01780	L0320-01780	LIGHT GREY SLATE	01780	01780	01780	01780	02
	L0220-01781	L0320-01781	ALPACA SLATE	01781	01781	01781	01781	02
	L0223-01753	L0323-01753	MODERN GREY OAK, PLANK	01753	01753	01753	01753	03
	L0223-01754	L0323-01754	CHOCOLATE OAK, PLANK	01754	01754	01754	01754	08
	L0223-01755	L0323-01755	DRIFT OAK, PLANK	01755	01755	01755	01755	03
	L0223-01756	L0323-01756	EUROPEAN OAK, PLANK	01756	01756	01756	01756	05
	L0223-01757	L0323-01757	BURNT OAK, PLANK	01757	01757	01757	01757	04
	L0223-01760	L0323-01760	RECLAIMED GREY OAK, PLANK	01760	01760	01760	01760	02
	L0223-01763	L0323-01763	MIDNIGHT OAK, PLANK	01763	01763	01763	01763	02
	L0223-01764	L0323-01764	WINTER OAK, PLANK	01764	01764	01764	01764	02
	L0223-01765	L0323-01765	AUTUMN OAK, PLANK	01765	01765	01765	01765	02
	L0223-01766	L0323-01766	NATURAL ASH, PLANK	01766	01766	01766	01766	03
	L0223-03359	L0323-03359	CLASSIC BEIGE OAK, PLANK	03359	03359	03359	03359	04
	L0223-03360	L0323-03360	ROYAL OAK, PLANK	03360	03360	03360	03360	08
	L0223-03361	L0323-03361	ROMANTIC OAK, PLANK	03361	03361	03361	03361	02
	L0223-03362	L0323-03362	COTTAGE GREY OAK, PLANK	03362	03362	03362	03362	02
	L0231-03367	L0331-03367	LIMED GREY OAK, PLANK	03367	03367	03367	03367	02
	L0231-03368	L0331-03368	URBAN GREY OAK, PLANK	03368	03368	03368	03368	02
	L0231-03369	L0331-03369	NEW ENGLAND OAK, PLANK	03369	03369	03369	03369	02
	L0231-03370	L0331-03370	MANOR OAK, PLANK	03370	03370	03370	03370	04
	L0231-03371	L0331-03371	FARMHOUSE OAK, PLANK	03371	03371	03371	03371	08
	L0231-03372	L0331-03372	MODERN DANISH OAK, PLANK	03372	03372	03372	03372	01
	L0231-03373	L0331-03373	BRUSHED WHITE PINE, PLANK	03373	03373	03373	03373	01
	L0231-03374	L0331-03374	COASTAL OAK, PLANK	03374	03374	03374	03374	03
	L0231-03375	L0331-03375	VILLAGE OAK, PLANK	03375	03375	03375	03375	04
	L0231-03376	L0331-03376	SCRAPED VINTAGE OAK, PLANK	03376	03376	03376	03376	05
	L0231-03866	L0331-03866	FROST WHITE OAK, PLANK	03866	03866	03866	03866	02
	L0231-03867	L0331-03867	STUDIO OAK, PLANK	03867	03867	03867	03867	02
	L0231-03868	L0331-03868	CITY OAK, PLANK	03868	03868	03868	03868	04
	L0231-03869	L0331-03869	BLACK PEPPER OAK, PLANK	03869	03869	03869	03869	08
	L0234-03568	L0334-03568	SIBERIAN OAK, PLANK	03568	03568	03568	03568	02
	L0234-03570	L0334-03570	ROCKY MOUNTAIN OAK, PLANK	03570	03570	03570	03570	02
	L0234-03571	L0334-03571	SEASIDE OAK, PLANK	03571	03571	03571	03571	03
	L0234-03589	L0334-03589	CHATEAU OAK, PLANK	03589	03589	03589	03589	05
	L0234-03590	L0334-03590	COUNTRY OAK, PLANK	03590	03590	03590	03590	08
	L0234-03862	L0334-03862	LIGHT FJORD OAK, PLANK	03862	03862	03862	03862	01
	L0234-03863	L0334-03863	FJORD OAK, PLANK	03863	03863	03863	03863	02
	L0234-03864	L0334-03864	LODGE OAK, PLANK	03864	03864	03864	03864	08
	L0234-03865	L0334-03865	CHALKED NORDIC OAK, PLANK	03865	03865	03865	03865	02
	L0234-03870	L0334-03870	BEACH TOWN OAK, PLANK	03870	03870	03870	03870	04
	L0239-04289	L0339-04289	NORTH CAPE OAK, PLANK	04289	04289	04289	04289	01

pro X	original Excellence & pro	living Expression	Art.nr / Decor					
				5-in-1	Wallbase straight	Wallbase straight	Beading	Sealant
				13 x 48 PGINCP(-)	12 x 58 PGSK(-)	14 x 77 PGPSK(-)	17 x17 PGSCOT(-)	310 ml PGKIT(-)
	L0239-04291	L0339-04291	NORDIC SAND OAK, PLANK	04291	04291	04291	04291	01
	L0239-04293	L0339-04293	SKAGEN OAK, PLANK	04293	04293	04293	04293	03
	L0239-04295	L0339-04295	STOCKHOLM OAK, PLANK	04295	04295	04295	04295	04
	L0239-04297	L0339-04297	ISLAND OAK, PLANK	04297	04297	04297	04297	03
	L0239-04299	L0339-04299	TUNDRA OAK, PLANK	04299	04299	04299	04299	04
	L0239-04301	L0339-04301	RIVERSIDE OAK, PLANK	04301	04301	04301	04301	06
	L0239-04303	L0339-04303	GREY BARNHOUSE OAK, PLANK	04303	04303	04303	04303	06
	L0239-04305	L0339-04305	MOORLAND OAK, PLANK	04305	04305	04305	04305	03
	L0239-04307	L0339-04307	BARNHOUSE OAK, PLANK	04307	04307	04307	04307	02
	L0239-04309	L0339-04309	MEADOW OAK, PLANK	04309	04309	04309	04309	08
	L0239-04311	L0339-04311	VINTAGE GREY OAK, PLANK	04311	04311	04311	04311	02
	L0239-04313	L0339-04313	ESTATE OAK, PLANK	04313	04313	04313	04313	04
	L0239-04315	L0339-04315	WEATHERED PINE, PLANK	04315	04315	04315	04315	-
	L0239-04317	L0339-04317	TASMANIAN OAK, PLANK	04317	04317	04317	04317	06
	L0239-04319	L0339-04319	REFINED WALNUT, PLANK	04319	04319	04319	04319	06
	L0245-04994	L0345-04994	BLOSSOM OAK	04994	04994	04994	04994	08
	L0245-04995	L0345-04995	VALLEY OAK	04995	04995	04995	04995	04
	L0245-04996	L0345-04996	ABBEY OAK	04996	04996	04996	04996	03
	L0245-04997	L0345-04997	NORTHERN OAK	04997	04997	04997	04997	02
	L0245-04998	L0345-04998	SEASALT OAK	04998	04998	04998	04998	01
	L0245-04999	L0345-04999	VITALETA OAK	04999	04999	04999	04999	01
	L0245-05000	L0345-05000	BORGIO OAK	05000	05000	05000	05000	05
	L0245-05002	L0345-05002	PORT OAK	05002	05002	05002	05002	04
	L0245-05003	L0345-05003	WILDWOOD OAK	05003	05003	05003	05003	04
	L0245-05004	L0345-05004	RIVER ROCK OAK	05004	05004	05004	05004	-
	L0245-05005	L0345-05005	MOUNTAIN CABIN OAK	05005	05005	05005	05005	08
	L0245-05006	L0345-05006	ATELIER OAK	05006	05006	05006	05006	04
	L0246-05007	L0346-05007	COMFORT GREY OAK	05007	05007	05007	05007	02
	L0246-05008	L0346-05008	RAILWAY OAK	05008	05008	05008	05008	03
	L0246-05009	L0346-05009	COLOGNE OAK	05009	05009	05009	05009	05
	L0246-05010	L0346-05010	PIER OAK	05010	05010	05010	05010	04
	L0246-05011	L0346-05011	VIENNA OAK	05011	05011	05011	05011	04
	L0246-05012	L0346-05012	PORTMAN WALNUT	05012	05012	05012	05012	08
	L0246-05021	L0346-05021	RED CLAY TEAK	05021	05021	05021	05021	07
	L0246-05022	L0346-05022	TROMSDALEN OAK	05022	05022	05022	05022	01
	L0247-01804	L0347-01804	NATURAL OAK	01731	01731	01731	01731	05
	L0247-01805	L0347-01805	DARK GREY OAK	01730	01730	01730	01730	02
	L0247-05023	L0347-05023	VINEYARD OAK	05023	05023	05023	05023	03
	L0247-05024	L0347-05024	MISTY OAK	05024	05024	05024	05024	02
	L0247-05025	L0347-05025	SOFT CABIN OAK	05025	05025	05025	05025	04
	L0247-05026	L0347-05026	MAINE OAK	05026	05026	05026	05026	02
	L0247-05027	L0347-05027	SEA STACK OAK	05027	05027	05027	05027	01
	L0247-05028	L0347-05028	POTTERY OAK	05028	05028	05028	05028	08
	L0248-05013	L0348-05013	BROWN LEATHERED OAK	05013	05013	05013	05013	08
	L0248-05014	L0348-05014	SANDWAVE OAK	05014	05014	05014	05014	03
	L0248-05015	L0348-05015	WHITE GLOOM OAK	05015	05015	05015	05015	02
	L0248-05016	L0348-05016	ISLA OAK	05016	05016	05016	05016	03
	L0248-05017	L0348-05017	RICARD OAK	05017	05017	05017	05017	04
	L0248-05018	L0348-05018	CAPPUCCINO OAK	05018	05018	05018	05018	05
	L0248-05019	L0348-05019	CORNWALL OAK	05019	05019	05019	05019	04
	L0248-05020	L0348-05020	DARTMOOR OAK	05020	05020	05020	05020	02

Matching matrix

domestic Elegance	Art.nr / Decor	5-in-1 13 x 48 PGINCP(-)	Wallbase straight 12 x 58 PGSK(-)	Wallbase straight 14 x 77 PGPSK(-)	Beading 17 x17 PGSCOT(-)	Sealant 310 ml PGKIT(-)
L060x-04386	VINEYARD OAK, PLANK	04386	04386	04386	04386	02
L060x-04387	MILK WHITE OAK, PLANK	04387	04387	04387	04387	01
L060x-04388	ELEGANT GREY OAK, PLANK	04388	04388	04388	04388	02
L060x-04389	RIVER OAK, PLANK	04389	04389	04389	04389	03
L060x-04390	NATURAL BEIGE OAK, PLANK	04390	04390	04390	04390	03
L060x-04391	HIGHLAND BROWN OAK, PLANK	04391	04391	04391	04391	02
L060x-04392	CONVENT OAK, PLANK	04392	04392	04392	04392	03
L060x-04393	CANYON OAK, PLANK	04393	04393	04393	04393	04
L060x-04394	WARM NATURAL OAK, PLANK	04394	04394	04394	04394	04
L060x-04395	WATERFRONT OAK, PLANK	04395	04395	04395	04395	02

Incizo® stairbase subprofile

Product group	Range	Mat. description	Fits floor thickness
Classic plank	domestic Elegance	NEINCPBASE1	7 mm
Big slab	living Expression / original Excellence & pro	NEINCPBASE2	8 mm
Modern plank – Sensation	living Expression / original Excellence & pro	NEINCPBASE8	8 mm
Bergen – Sensation	living Expression / original Excellence & pro	NEINCPBASE8	8 mm
Stavanger – Sensation	living Expression / original Excellence & pro	NEINCPBASE8	8 mm
Drammen	living Expression / original Excellence & pro	NEINCPBASE2	8 mm
Mandal	living Expression / original Excellence & pro	NEINCPBASE2	8 mm
Modern plank – Sensation	living Expression / original Excellence & pro	NEINCPBASE9	9 mm
Long plank	living Expression / original Excellence & pro	NEINCPBASE6	9.5 mm
Wide Long Plank – Sensation	living Expression / original Excellence & pro	NEINCPBASE6	9.5 mm

Technical guide

Features	pro X	original Excellence & pro	living Expression	domestic Elegance
TitanX™	•	•	•	•
Scratch resistance	Very high	Very high	High	High
AquaSafe technology*	•	•	•	–
PerfectFold™	–	•	•	–
Uniclic®	•	•	•	•
Antistatic	•	•	•	•
Hygienic	•	•	•	•
Wood from sustainably managed forests, PEFC certified	•	•	•	•
Environmental Label Nordic Ecolabel and EU Ecolabel	•	•	•	•
Residential warranty	Lifetime	Lifetime	25 years	20 years

Technical	Standard	pro X	original Excellence & pro	living Expression	domestic Elegance
Class of use	EN 13329	34	33	32	32
Fire classification	EN 13501	Bfl-s1	Bfl-s1**	Cfl-s1	Cfl-s1
Formaldehyde emission	EN 717	E1	E1	E1	E1
VOC emission	agBB/DIBt	•	•	•	•
Generic anti-microbial effect	JIS Z 2801	> 99%	> 99%	> 99%	> 99%
Wear resistance	EN 13329	AC6	AC5	AC4	AC4
Impact resistance	EN 13329	Small ball: ≥ 20 N Big ball: ≥ 1600 mm	Small ball: ≥ 15 N Big ball: ≥ 1000 mm	Small ball: ≥ 12 N Big ball: ≥ 750 mm	Small ball: ≥ 12 N Big ball: ≥ 750 mm
Resistance to castor chair (with underlay)	ISO 4918	No damage	No damage	No damage	No damage
Slip resistance	EN 14041	Class DS	Class DS	Class DS	Class DS
Thermal resistance	EN 12667	0.07 m² K/W	0.07 m² K/W	0.06 m² K/W	0.06 m² K/W
Body voltage	EN 1815	<2 kV (antistatic)	<2kV (antistatic)	<2kV (antistatic)	<2kV (antistatic)

*available in Modern Plank, Wide Long Plank, Bergen, Stavanger and Narvik pro X with a 10-year wet guarantee and in Mandal and Drammen with a 5-year wet guarantee.

** Cfl-s1 for Modern Plank, Bergen Pro, Stavanger Pro, Drammen Pro, Mandal Pro.

Formats

	Panel, mm			Packages				
	Length	Width	Thickness	Panels / pack	m² / pack	Pack / palett	m² / palett	
pro X								
L0139-xxxxx	Narvik pro X 4V – Sensation, aquasafe	1380	190	9	6	1.573	64	100
original Excellence & pro								
L0231-xxxxx	Modern Plank 4V – Sensation, aquasafe	1380	190	8	7	1.835	48	88.08
L0239-xxxxx	Modern Plank 4V – Sensation, aquasafe	1380	190	9	6	1.573	64	100.68
L0234-xxxxx	Wide Long Plank 4V – Sensation, aquasafe	2050	240	9.5	6	2.952	33	97.42
L0246-xxxxx	Bergen 4V – Sensation, aquasafe	1380	156	8	8	1.722	60	103.32
L0245-xxxxx	Stavanger 4V – Sensation, aquasafe	1380	278.5	8	6	2.306	48	110.69
L0248-xxxxx	Drammen 4V, aquasafe	1200	190	8	7	1.596	64	102.14
L0247-xxxxx	Mandal, aquasafe	1200	190	8	7	1.596	64	102.14
L0223-xxxxx	Long Plank 4V	2050	205	9.5	6	2.522	44	110.95
L0218-xxxxx	Big Slab	1224	408	8	2	0.999	80	79.90
L0220-xxxxx	Big Slab 4V	1224	408	8	2	0.999	80	79.90
living Expression								
L0331-xxxxx	Modern Plank 4V – Sensation, aquasafe	1380	190	8	7	1.835	48	88.08
L0339-xxxxx	Modern Plank 4V – Sensation, aquasafe	1380	190	9	6	1.573	64	100.68
L0334-xxxxx	Wide Long Plank 4V – Sensation, aquasafe	2050	240	9.5	6	2.952	33	97.42
L0346-xxxxx	Bergen 4V – Sensation, aquasafe	1380	156	8	8	1.722	60	103.32
L0345-xxxxx	Stavanger 4V – Sensation, aquasafe	1380	278.5	8	6	2.306	48	110.69
L0348-xxxxx	Drammen 4V, aquasafe	1200	190	8	7	1.596	64	102.14
L0347-xxxxx	Mandal, aquasafe	1200	190	8	7	1.596	64	102.14
L0323-xxxxx	Long Plank 4V	2050	205	9.5	6	2.522	44	110.95
L0318-xxxxx	Big Slab	1224	408	8	2	0.999	80	79.90
L0320-xxxxx	Big Slab 4V	1224	408	8	2	0.999	80	79.90
domestic Elegance								
L0601-xxxxx	Classic Plank	1200	190	7	8	1.824	64	116.74
L0607-xxxxx	Classic Plank 4V	1200	190	7	8	1.824	64	116.74

Technical guide: accessories

		Piece			Pack		Pallet		Ordering Unit	
		length mm	width mm	height mm	qty /pc	pc /pack	qty /pack	pc /pallet		qty /pallet
PGSK(-)	Wallbase straight, colour matched	2400	12	58	2.4 r.m.	6	14.4 r.m.	720	1728 r.m.	pc
PGPSK(-)	Wallbase straight, colour matched	2400	14	77	2.4 r.m.	6	14.4 r.m.	432	1036.8 r.m.	pc
PGSCOTWHITE	Beading, white	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc
PGSCOTPAINT	Beading, paintable	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc
PGSCOT(-)	Beading, colour matched	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc
PGISKRCOVER	Wallbase cover, paintable	2400	16	129	2.4 r.m.	6	14.4 r.m.	336	806.4 r.m.	pc
NEVSKRPAINTA	Waterproof wallbase	2000	12	55	2 r.m.	6	12 r.m.	630	1260 r.m.	pc

Profiles

PGINCP(-)	5-in-1	2150	48	13	2.15 r.m.	1	2.15 r.m.	266	571.9 r.m.	pc
NEINCPBASE1	Stairbase subprofile	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc
NEINCPBASE2	Stairbase subprofile	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc
NEINCPBASE6	Stairbase subprofile	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc
NEINCPBASE8	Stairbase subprofile	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc
NEINCPBASE9	Stairbase subprofile	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc
PGPRSILV	Combi moulding, silver	1860	47	10	1.86 r.m.	1	1.86 r.m.	340	632.4 r.m.	pc
PGENPSILVME270	End moulding, silver	2700	25	9.5	2.7 r.m.	10	27 r.m.	400	1080 r.m.	pc
PGSTPSILVME250	Stair nose, aluminium	2500	30	25	2.5 r.m.	5	12.2 r.m.	250	625 r.m.	pc

Commercial range

PGEXPC(-)ME235	T-moulding, colour matched	2350	50	9.5	2.35 r.m.	5	11.75 r.m.	225	528.75 r.m.	>30 pc
PGEXPCNATURE	T-moulding profile, nature	2350	50	9.5	2.35 r.m.	5	11.75 r.m.	225	528.75 r.m.	pc
PGEXPCSILVME270	T-moulding, silver	2700	45	12	2.7 r.m.	10	27 r.m.	250	675 r.m.	pc
PGENPCSILVME270	End moulding, silver	2700	45	10.3	2.7 r.m.	20	54 r.m.	400	1080 r.m.	pc
PGRPC80SILVME270	Ramp profile (adaptor) drilled	2700	80	11	2.7 r.m.	10	27 r.m.	300	810 r.m.	pc
PGRPC55SILVME315A	Ramp profile without screws	3150	55	11.55	3.15 r.m.	10	31.5 r.m.	30	94.5 r.m.	pc
PGRPC55CORNSILVMEA	Precut corner 90° to low ramp profile (adaptor) no screws	200 x 200	55	11.55		4				pc
PGRPC85SILVME315	Ramp profile high without screws	3150	85	24	3.15 r.m.	5	15.75 r.m.	30	94.5 r.m.	pc
PGRPC85CORNSILVME	Precut corner 90° to high ramp profile (adaptor) no screws	200 x 200	85	24		4				pc
PGDOORMATBROWN6	Doormat for commercial use, brown	2000	3000	2	6 m ²		6 m ²			pc
PGLAMCUT	Professional laminate cutter	700	280	230	1 pc	1	1 pc	32	32 pc	pc
NEBENDPCSILVME270	Bendable profile	2700	13.1	28	2.7 r.m.	10	27 r.m.	600		pc
NEBTOOL	Bending tool for bendable profiles	380	410	235	1 pc	1	1 pc	8		pc
PGWTAPPINGBLOCK	Professional tapping block	520	110	62	1 pc	10	10 pc	480		pc
PGWPULLBAR	Professional pullbar	700	280	230	1 pc	1	1 pc	120		pc

Underlays

PGUDLFOAM15B	Underlay Foam	15800	950	1.8	15 m ²	12	180 m ²	24	360 m ²	roll
PGUDLSMART15	Smart Underlay	15000	1000	3	15 m ²	9	135 m ²	18	270 m ²	pc
PGUDLSMARTPLUS15	Smart Underlay+	15000	1000	3	15 m ²	9	135 m ²	18	270 m ²	pc
PGUDLPS15	Professional Soundbloc, 15 m ²	15790	950	2	15 m ²	10	150 m ²	20	300 m ²	roll
PGUDLPS50	Professional Soundbloc, 50 m ²	52640	950	2	50 m ²	6	300 m ²	6	300 m ²	roll
PGUDLSW7	Silent Walk	7000	1000	2	7 m ²	20	140 m ²	40	280 m ²	roll
PGUDLSCREEN34	PE film	12500	2700	0.2	33.75 m ²	60	2025 m ²	60	2025 m ²	roll
PGUDLMOH15	Moisturbloc Extreme	15000	1050	2.5	15 m ²	15	225 m ²	15	225 m ²	roll
PGUDLFOAMPLUS15	Underlay Foam+	15789	950	2	15 m ²	10	150 m ²	20	300 m ²	roll
NETAPE50	Tape, self adhesive	5000	50	0.5	50 r.m.	24	1200 r.m.	1200	60.000 r.m.	pc

Floor heating

		Piece			Pack		Pallet		Ordering Unit	
		length mm	width mm	height mm	qty /pc	pc /pack	qty /pack	pc /pallet		qty /pallet
NEUDLQ60X300	QuickHeat foil, 0.6 x 3 m	3000	600	0.35	16.2 m ²	1	16.2 m ²	9	2916 m ²	roll
NEUDLQH60X500	QuickHeat foil, 0.6 x 5 m	5000	600	0.35	23 m ²	1	23 m ²	9	4140 m ²	roll
NEUDLQH60X700	QuickHeat foil, 0.6 x 7 m	7000	600	0.35	37.8 m ²	1	37.8 m ²	9	6804 m ²	roll
NEUDLQH100X300	QuickHeat foil, 1 x 3 m	3000	1000	0.35	18 m ²	1	18 m ²	6	2052 m ²	roll
NEUDLQH100X500	QuickHeat foil, 1 x 5 m	5000	1000	0.35	30 m ²	1	30 m ²	6	3420 m ²	roll
NEUDLQH100X700	QuickHeat foil, 1 x 7 m	7000	1000	0.35	42 m ²	1	42 m ²	6	4788 m ²	roll
NEUDLQH120X300	QuickHeat foil, 1.2 x 3 m	3000	1200	0.35	21.6 m ²	1	21.6 m ²	6	2462.4 m ²	roll
NEUDLQH120X500	QuickHeat foil, 1.2 x 5 m	5000	1200	0.35	36 m ²	1	36 m ²	6	4104 m ²	roll
NEUDLQH120X700	QuickHeat foil, 1.2 x 7 m	7000	1200	0.35	50.4 m ²	1	50.4 m ²	6	5745.6 m ²	roll
NEUDLQHPLATE	QuickHeat plates, 120 x 50 x 0.7 cm	1200	500	7	0.6 m ²	10	6 m ²			pack
NEQHKITWIFI	Controller kit, wireless, 12 x 10 x 3.5 cm	120	100	35		1				pc
NEQHEXTCAB100	Extension cables, 1.0 m			1 lpm		1	1 lpm			pc
NEQHEXTCAB300	Extension cables, 3.0 m			3 lpm		1	3 lpm			pc

Installation

PGTOOL	Installation kit	285	85	70		10		320		pc
PGSPACER	Extra spacers	190	85	50		28		896		pc
PGCLIPS15LM	Wallbase installation kit	185	90	60		10		320		pc
PGCLIPSKME95	Wallbase installation clips	394	139	59	50 clips	20	1000 clips	420	21.000	clips
PGCLIPSKME7080	Wallbase installation clips	394	139	59	50 clips	20	1000 clips	420	21.000	clips
NEPLUG	Connection plugs	150	100	40	24 plugs	10	240 plugs	1000	24.000	plugs
PGGLUE290	Multiglue	49	49	245	290 ml	12	3480 ml	1200		pc
PGSEAL500	Safeseal	240	65	65	500 ml	6	3000 ml	1080		pc
PGKIT(-)	Sealant	230	50	50	310 ml	6	1860 ml	756		pc
PGKITTRANSP	Aqua Sealant, water resistant and transparent, 310ml	215	49		310 ml	12	3720 ml	1200		pc
NEFOAMSTRIP20	PE foam expansion joint filler 20 m	2000	10		20 r.m.		20 r.m.	125	2500 r.m.	pc
PGRCINOX15	Stainless steel radiator cover (2 pc/blister) 15 mm	15		1	2 pc	15	30 pc	1000		pc
PGRCINOX22	Stainless steel radiator cover (2 pc/blister) 22 mm	22		1	2 pc	15	30 pc	1000		pc
NETRACK	Wallbase installation track	2400	8	27	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc

Maintenance

PGCLEANKIT	Cleaning kit	760	200	50		10		150		pc
PGCLEANALL1000	All round floor cleaner	265	80	80	1000 ml	10	10 l	500		pc
PGREPAIR	Repair wax	290	125	28		12		648		pc

Environmentally responsible, beautiful and long-lasting – that's Pergo durability



Pergo was the first laminate floor to be certified with the Nordic Ecolabel, the Green Swan. All Pergo laminate floors carry this label. An example of a good environmental product.




Pergo is also the first to receive the European Ecolabel for laminate flooring through our parent company Unilin. The EU Ecolabel is a label of environmental excellence that is awarded to products and services meeting high environmental standards throughout their life-cycle: from raw material extraction, to production, distribution and disposal.



PEFC stands for "Programme for the Endorsement of Forest Certification" and is the world's largest forest certification system. PEFC secure the way forests are managed. All Pergo floorings and skirting's have certified HDF.



Laminate flooring made with its full lifecycle in mind – using natural materials, producing low manufacturing emissions and providing easy recycling and disposal solutions. Quality and manufacturing in Europe guaranteed by EPFL.




* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

French mandatory labelling of construction products installed indoor. Floor coverings must be labelled with their emission classes based on emission testing. A+ is the lowest emission class.



Various chemicals are emitted from building and interior decoration materials into indoor air. This Finnish classification presents emission requirements for the building materials like floor coverings used in ordinary work spaces and residences with respect to good indoor air quality. M1 certified products are odorless and have the lowest emissions.



An EPD® (Environmental Product Declaration) is a verified and registered document that communicates transparent and comparable information about the life-cycle environmental impact of products. The declaration number for Pergo laminate flooring is EPD-UNI-20170035-IBD1-EN.



pergo.com

PERGO®

Pergo is a quality product produced by **UNILIN** bv, division flooring, Ooigemstraat 3, 8710 Wielsbeke, Belgium

